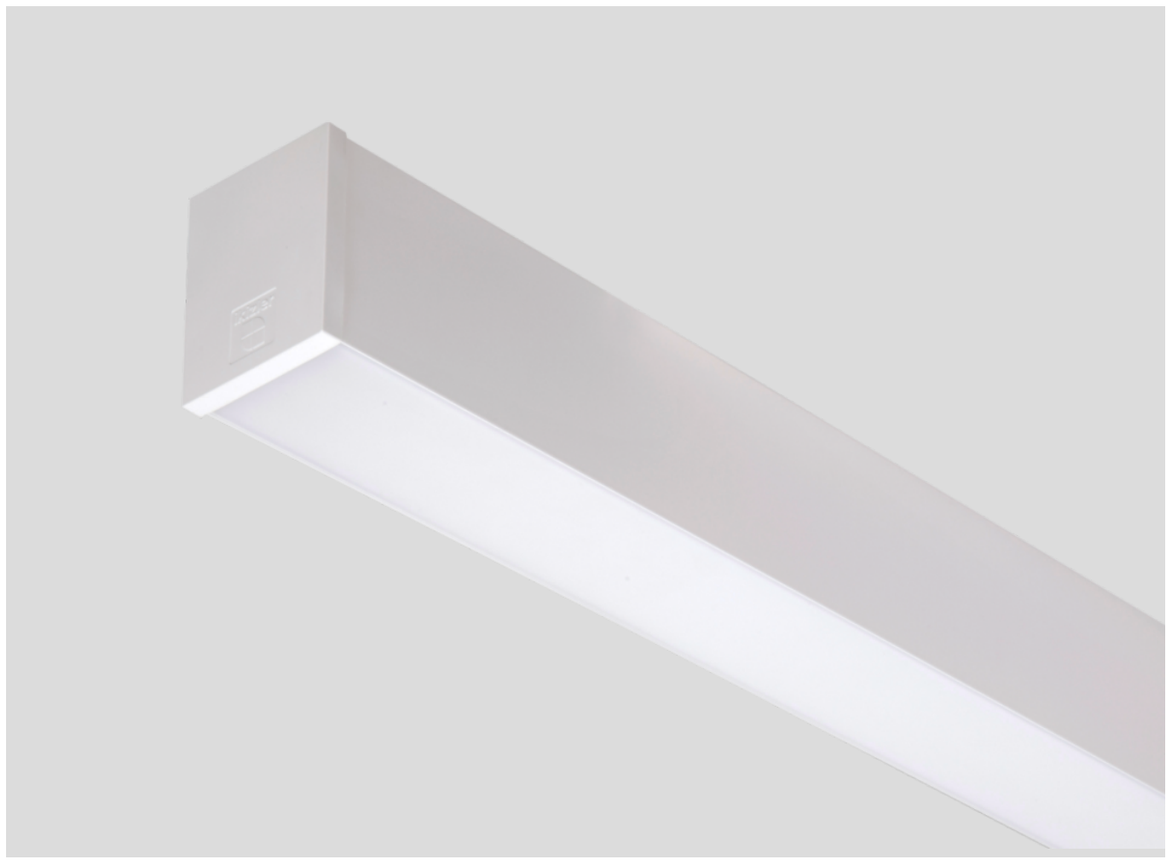


WATERLINE 070-IP54

01193


IP54 Linear Lighting Luminaire


The Waterline 070 Series is an aesthetically pleasing linear lighting solution offering IP54 protection thanks to its special silicone-sealed diffuser design. This unique structure provides high resistance to dust and moisture while creating a homogeneous and comfortable light distribution. Thanks to its double-cover design, the mounting screws are not visible from the outside. The sealing system, compressed with the inner cover, ensures a watertight seal, while the outer cover gives the product a simple and integrated look. A transparent inner cover option allows for uninterrupted lighting in linear applications.

It offers a reliable lighting solution for metro stations, high-speed train platforms, tunnels, pedestrian crossings, and outdoor eaves applications.

RAL 9016 RAL 9005 RAL 9006

GLOW WIRE 650°C IP54 IK09 RoHS COMPLIANT

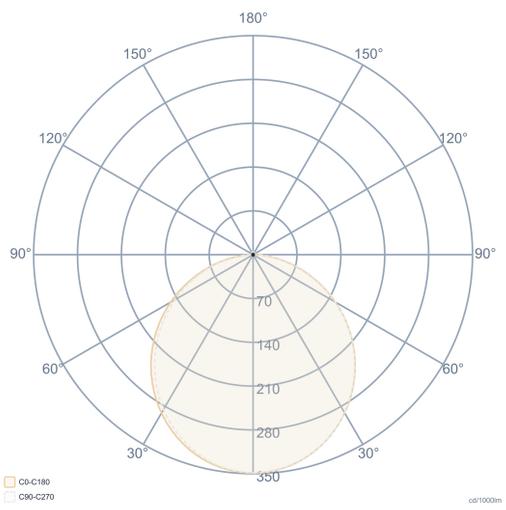



General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	**Power**	18-65W	**Light Output Angle**	110°
Side Cover	PC Injection	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Optics	Silicone Sealed Extruded PC	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Paint	Electrostatic Powder Paint	**Cabling**	Halojen-Free	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**Input Voltage**	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	70(W) x 82(H)	**LED Driver**	Constant Current		
Mounting Type	Surface	**Ambient Temperature**	-20°C / +50°C		
Mounting Part	Metal Bracket	**LED Lifetime L70**	>102.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
01193.78.30.019	18	1900	3000	585	1,40
01193.78.40.020	18	2000	4000	585	1,40
01193.78.30.029	27	2850	3000	865	2,00
01193.78.40.030	27	3000	4000	865	2,00
01193.78.30.039	38	3880	3000	1145	2,60
01193.78.40.041	38	4100	4000	1145	2,60
01193.78.30.049	46	5050	3000	1425	3,20
01193.78.40.052	46	5200	4000	1425	3,20
01193.78.30.059	56	6000	3000	1705	3,80
01193.78.40.062	56	6150	4000	1705	3,80
01193.78.30.069	65	7050	3000	1985	4,50
01193.78.40.072	65	7200	4000	1985	4,50

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com