

# CORVUS INN


# 03170


## Contrast Inner Framed Surface Luminaire

The Corvus inn offers a modern design that sets it apart from standard round luminaires with its circular form and contrasting inner frame detail. The contrasting color application on the inner surface adds depth and a strong visual character to the product, creating a decorative effect in the space.

Its structure, which provides homogeneous light distribution, offers comfortable lighting. With its simple and modern design language, it stands out as a striking lighting element in offices, social areas, and architectural projects. With pendant and surface mounting alternatives, it offers functional and decorative lighting in one package, adaptable to different application needs.

RAL 9016 RAL 9005 RAL 9006

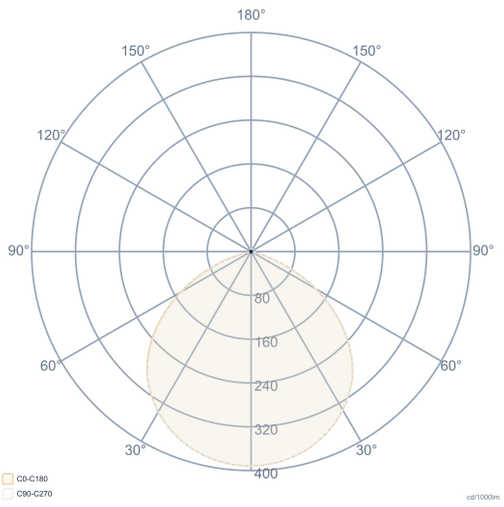

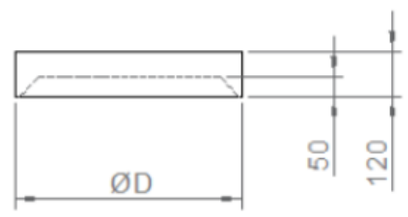
| General Information | |
|---|---|
| **Housing** | Aluminum Extruded |
| **Optics** | Opal |
| **Paint** | Electrostatic Powder Paint |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | Ø400/600x120(H) |
| **Mounting Type** | Surface |
| **Mounting Part** | Metal Bracket |

| Electrical Info | |
|---|---|
| **Power** | 19-38W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 120° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CR ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | CCT | ØDx(H) | Kg |
|---|---|---|---|---|---|
| 03170.40.30.018 | 19 | 1760 | 3000 | Ø400x120 | 2,70 |
| 03170.40.40.019 | 19 | 1950 | 4000 | Ø400x120 | 2,70 |
| 03170.60.30.030 | 38 | 4050 | 3000 | Ø600x120 | 4,00 |
| 03170.60.40.040 | 38 | 4200 | 4000 | Ø600x120 | 4,00 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com