


Reed

Indoor Lighting - Appliques

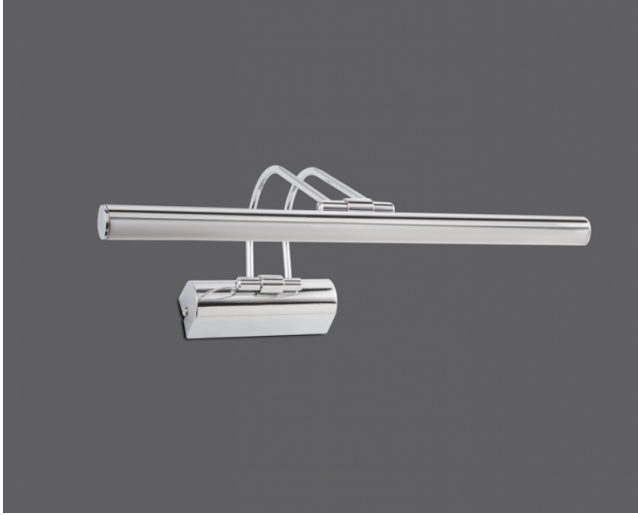

TECHNICAL INFORMATION

Housing	Nickel chrome plated brass
LED Lifetime	50.000 hours
L80B50	
Mounting System	Surface

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K



ELECTRICAL

Power (W)	5W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

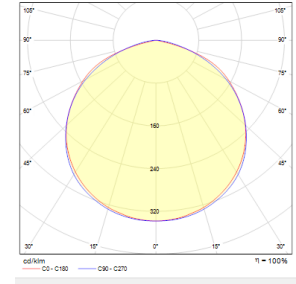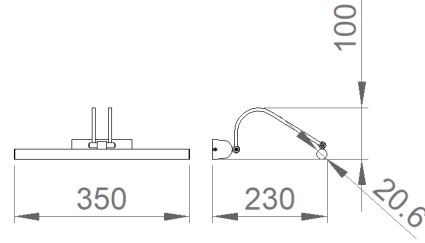

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
61169.42.40.005	5	500	4000	Ra>80	350x230x100	0,2

