


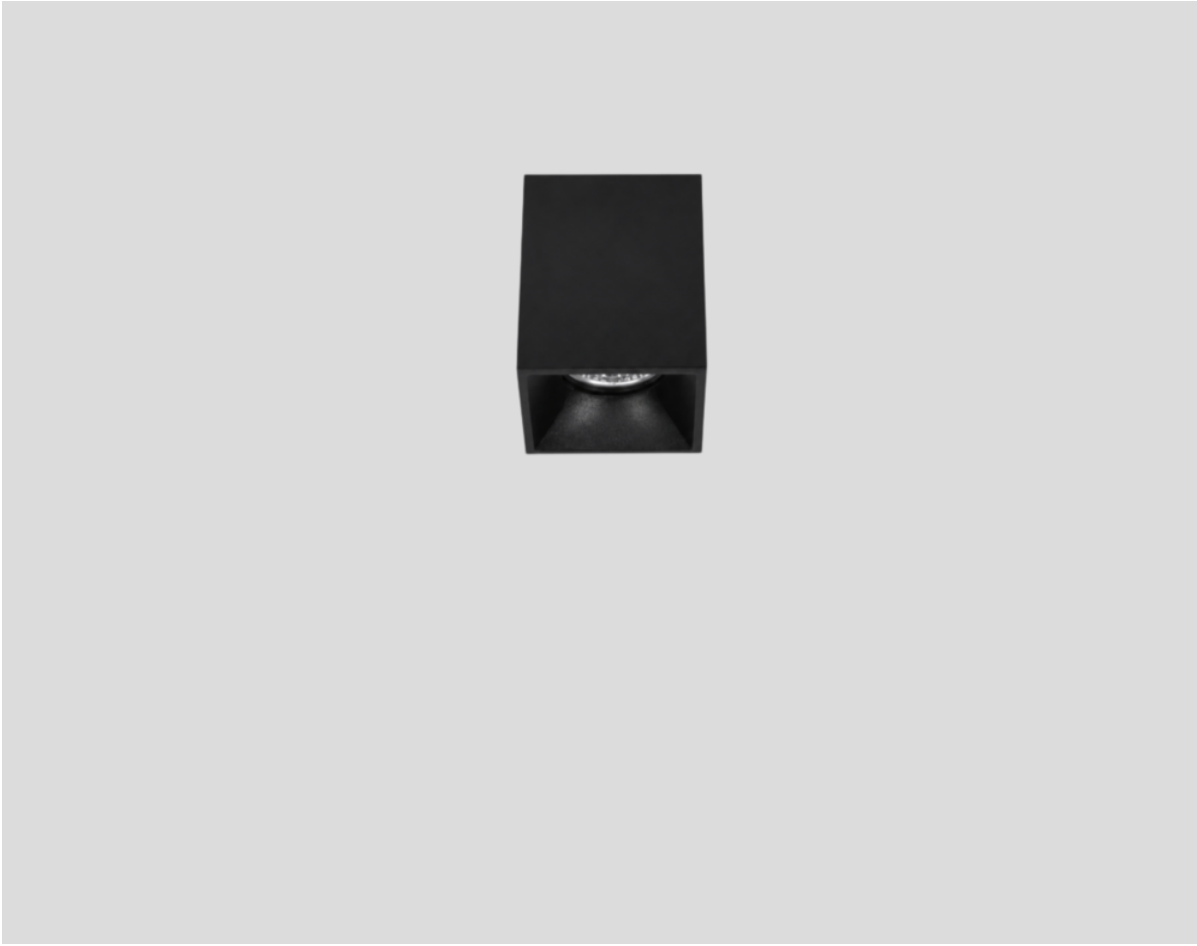



DEEP-K

09110

Minimal lighting in a cylindrical form

Deep-K is a simple and elegant spotlight solution developed for modern architectural projects, featuring a cylindrical body and surface mounting design. Its extruded aluminum body and metallized reflector optics provide controlled light distribution, while its $UGR \leq 19$ value enhances visual comfort.

With a 36° beam angle, high-efficiency optical system, and compact design, it can be used in general and accent lighting applications. Available in white, gray, and black, Deep-K adapts to various interior design concepts, combining modern aesthetics with high-performance lighting in offices, shops, hotels, restaurants, and social spaces.

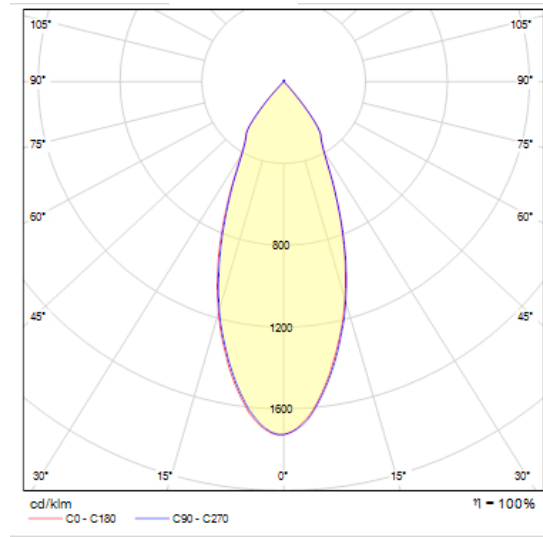

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	10W	Light Output Angle	36°
Frame	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 19
Optics	Polished Reflector	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Coating	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Kit	
Product Dimensions [mm]	80 x 80 x 100(H)	LED Driver	Constant Current		
Mounting Type	Surface	Ambient Temperature	-20°C / +50°C		
Mounting Part	Screw Dowel Set	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Kg
09110.88.30.009	10	700	36°	3000	80x80x100	0,40
09110.88.40.009	10	750	36°	4000	80x80x100	0,40

