




RAL 9016

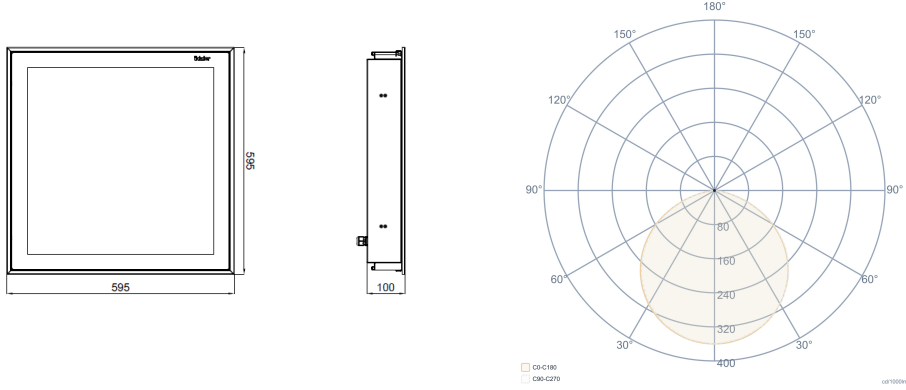


AURACLEAN IP65

02125

Seamless aesthetics, superior hygiene performance.

Auraclean is designed for sterile areas where high hygiene standards are critical. Its screwless front glass fixing system and smooth body design help reduce particle and dirt accumulation on the surface, while its easy-to-clean structure supports hygiene requirements.

With an optional antibacterial surface, it adapts to different project needs. It offers a reliable, functional, and aesthetically pleasing solution for controlled and hygienic environments such as hospitals, clean rooms, laboratories, and pharmaceutical manufacturing facilities.



General Information		Electrical Info		Lighting Technology	
Material	DKP Metal Sheet	Power	27-38W	Light Output Angle	120°
Optics	Glass + Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	595(W) x 595(L) x 90(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Metal Bracket	Ambient Temperature	-20°C / +40°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02125.66.30.033	32	3250	3000	595x595x100	580x580	8,20
02125.66.40.033	32	3350	4000	595x595x100	580x580	8,20
02125.66.30.038	37	3650	3000	595x595x100	580x580	8,20
02125.66.40.038	37	3800	4000	595x595x100	580x580	8,20
02125.66.30.045	45	4400	3000	595x595x100	580x580	8,20
02125.66.40.045	45	4550	4000	595x595x100	580x580	8,20