



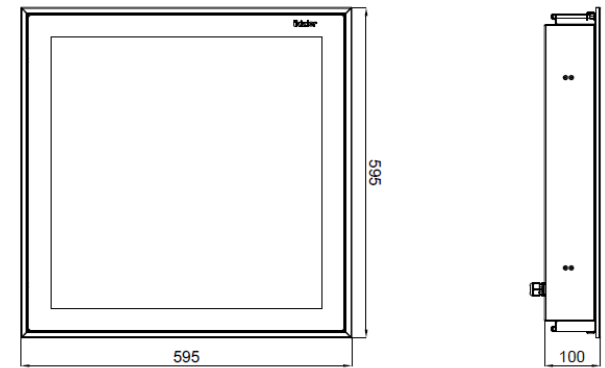

RAL 9016

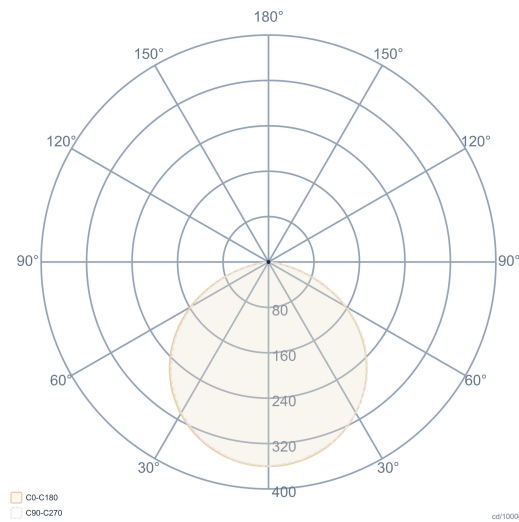

General Information		Electrical Info		Lighting Technology	
Material	DKP Metal Sheet	Power	32-45W	Light Output Angle	110°
Optics	Glass + Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	595(W) x 595(L) x 90(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Metal Bracket	Ambient Temperature	-20°C / +40°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02125.66.40.045.AU	45	4550	4000	595x595x100	580x580	8,20

