

Even-GN IP65

02142


IP65 Sterile Lighting Fixture

Even-GN IP65 is designed for clean and controlled indoor environments and offers IP65 protection thanks to its silicone-sealed structure. Its opal diffuser distributes light homogeneously, creating comfortable and balanced lighting in workspaces. Its metal sheet housing and sealed construction ensure reliable use in areas where dust and moisture are controlled, while its 120° wide beam angle provides even illumination on surfaces. Its 600x600 mm dimensions allow for easy integration into modular ceiling systems.

It combines aesthetic appearance, high visual comfort, and reliable performance in hospitals, laboratories, healthcare facilities, pharmaceutical production areas, corridors, and other indoor spaces requiring high hygiene standards.

CE · GLOW WIRE 650°C · IK 04 · IP 65 · RoHS COMPLIANT

RAL 9016 · RAL 9005 · RAL 9006

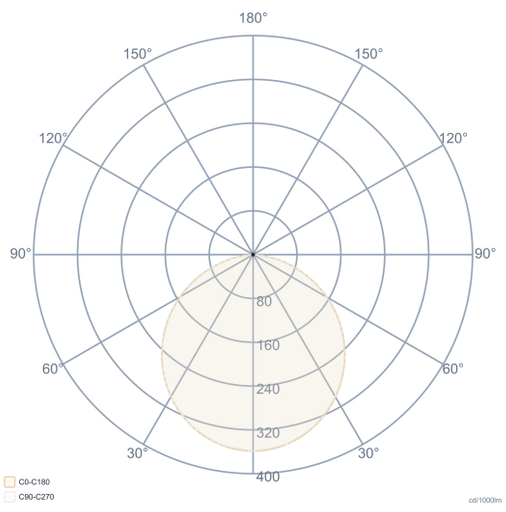



General Information	
Meterial	DKP Metal Sheet
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	595(W)x595(L)x70(H)
Mounting Type	Recessed
Mounting Part	Metal Bracket

Electrical Info	
Power	28-35W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	0°C / +40°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02144.66.30.033	28	3300	3000	595x595x70	580x580	4,50
02144.66.40.034	28	3400	4000	595x595x70	580x580	4,50
02144.66.30.038	33	3850	3000	595x595x70	580x580	4,50
02144.66.40.040	33	4000	4000	595x595x70	580x580	4,50
02144.66.30.043	39	4350	3000	595x595x70	580x580	4,50
02144.66.40.045	39	4500	4000	595x595x70	580x580	4,50

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com