

VELA IP65


06153


Sensor-equipped waterproof PC

This surface-mounted sensor luminaire features a modern, minimalist design and offers uniform, comfortable lighting thanks to its UV-stabilized polycarbonate housing, opal polycarbonate diffuser, and 120° symmetrical light distribution. It is available with power options of 15W or 20W and three color temperature choices: 3000K, 4000K, or 6500K.

Its integrated sensor contributes to energy savings through a 360° detection angle, a detection range of 1–5 meters, and adjustable operating settings. It is an ideal solution for stairwells, corridors, communal building areas, and passageways.

RAL 9016

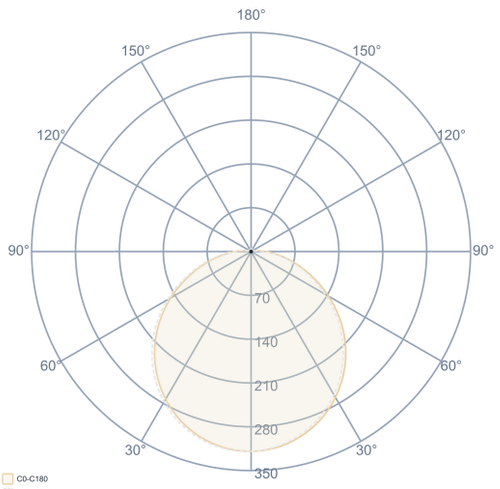

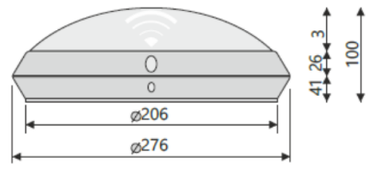

General Information	
Housing	UV Additive PC Injection Molding
Optics	Opal PC Injection
Gasket	Silicone
Sensor Detection Angle	360°
Detection Distance	1 - 5m
Insulation Class	Class I
Product Dimensions [mm]	Ø276x 100(H)
Mounting Type	Surface - max.2,8m
Mounting Part	Screw Dowel Set

Electrical Info	
Power	15W-20W
Power Factor	>0.95
Light Source	SMD LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-5°C / +55°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
Light Detection	2-2000 Lux
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	CRI	ØD x H (mm)	Kg
06153.27.30.012	15	1100	3000	Ra>80	Ø276x100	1,30
06153.27.40.012	15	1200	4000	Ra>80	Ø276x100	1,30
06153.27.65.012	15	1300	6500	Ra>80	Ø276x100	1,30
06153.27.30.022	20	2100	3000	Ra>80	Ø276x100	1,30
06153.27.40.022	20	2200	4000	Ra>80	Ø276x100	1,30
06153.27.65.022	20	2300	6500	Ra>80	Ø276x100	1,30

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com