



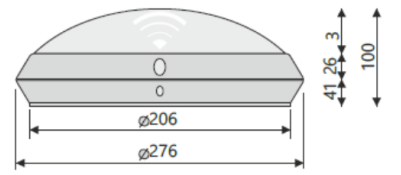

RAL 9016

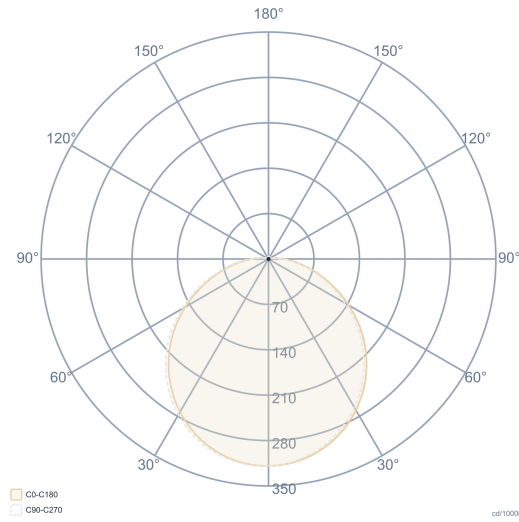

General Information		Electrical Info		Lighting Technology	
Housing	UV Additive PC Injection Molding	Power	15W	Light Output Angle	120°
Optics	Opal PC Injection	Power Factor	>0.95	Light Detection	2-2000 Lux
Gasket	Silicone	Light Source	SMD LED	UGR Value	UGR ≤ 22
Sensor Detection Angle	360°	Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
Detection Distance	1- 5m	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	LED Driver	Constant Current	Optional	
Product Dimensions [mm]	Ø276x 100(H)	Ambient Temperature	-5°C / +55°C		
		LED Lifetime L70	>50.000 Hour		
Mounting Type	Surface - max.2,8m	DALI / 1-10V			
Mounting Part	Screw Dowel Set	CRI>90 , 2700K~6500K , Tunable White			
		Emergency Lighting Unit			

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
06153.27.30.012	15	1100	3000	Ø276x100	1,30
06153.27.40.012	15	1200	4000	Ø276x100	1,30
06153.27.65.012	15	1300	6500	Ø276x100	1,30

