VELA IP65

06152

Sensor-equipped waterproof PC

This sensor-equipped surface-mounted luminaire features a modern and minimalist design; its UV-resistant PC body, opal polycarbonate diffuser, and 120° symmetrical light distribution provide homogeneous and comfortable illumination. With 15W of power, a 3000K color temperature, and 1050 lm of luminous flux, it delivers efficient performance.

Its integrated sensor contributes to energy savings with its 360° detection angle, 1–5 m detection distance, and adjustable operating features. It is an ideal solution for stairwells, hallways, building common areas, and passageways.

RAL 9016



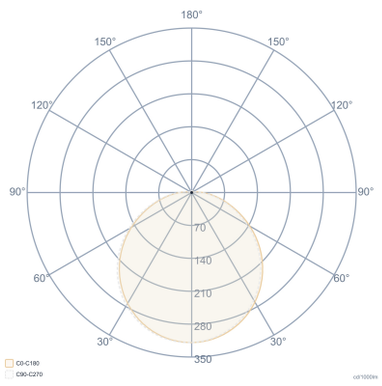

General Information		Electrical Info		Lighting Technology	
Housing	UV Additive PC Injection Molding	**Power**	15W	**Light Output Angle**	120°
Optics	Opal PC Injection	**Power Factor**	>0.95	**Light Detection**	2-2000 Lux
Gasket	Silicone	**Light Source**	SMD LED	**UGR Value**	UGR ≤ 22
Sensor Detection Angle	360°	**Cabling**	Halogen-Free	**CRI [Ra]**	CRI ≥ 80
Detection Distance	1- 5m	**Input Voltage**	220-240V AC / 50-60 Hz	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**LED Driver**	Constant Current		
Product Dimensions [mm]	Ø276x 100(H)	**Ambient Temperature**	-5°C / +55°C		
Mounting Type	Surface - max.2,8m	**LED Lifetime L70**	>50.000 Hour		
Mounting Part	Screw Dowel Set				

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
06153.27.40.012	15	1200	4000	Ø276x100	1,30

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com