



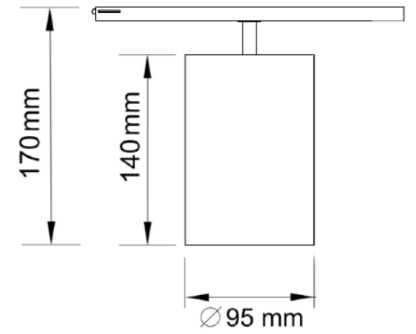

RAL 9016 RAL 9005

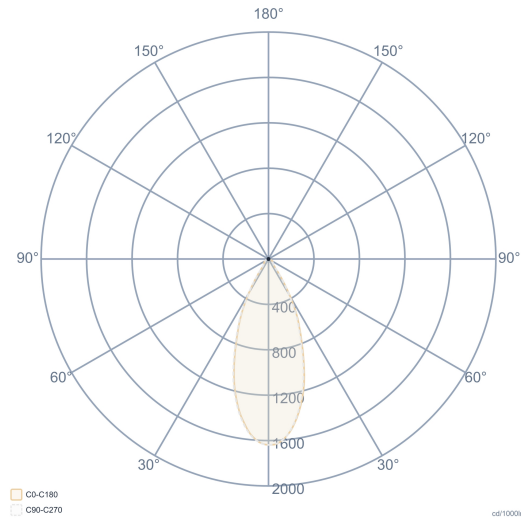

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Injection	Power	20-30-36W	Light Output Angle	15°- 30°- 45°- 60°
Optics	Metallized Surface Optics	Power Factor	>0.90	UGR Value	UGR ≤ 16
Diffuser	Transparent Safety Glass	Light Source	COB LED	CRI [Ra]	CRI ≥ 90
Paint	Electrostatic Powder Coating	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class III	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V Tunable White CRI>90 , 2700K~6500K , Tunable White 2700K ~ 6500K Casambi, Bluetooth Control	
Product Dimensions [mm]	Ø95(D)x140(L)	LED Driver	Rail Driver		
Mounting Type	Rail Socket	Ambient Temperature	-20°C / +50°C		
Mounting Part	Single-Phase Rail Socket	LED Lifetime L70	>100.000 Hour		

Order Code	W	Angle	Lm	CCT	ØD x H (mm)	Kg
05637.95.30.021	20	35°	2100	3000	Ø95x140	0,40
05637.95.40.021	20	35°	2100	4000	Ø95x140	0,40
05637.95.65.021	20	35°	2100	3000	Ø95x140	0,40
05637.95.30.033	30	35°	3300	3000	Ø95x140	0,40
05637.95.40.033	30	35°	3300	4000	Ø95x140	0,40
05637.95.65.033	30	35°	3300	6500	Ø95x140	0,40
05637.95.30.038	36	35°	3800	3000	Ø95x140	0,40
05637.95.40.038	36	35°	3800	4000	Ø95x140	0,40
05637.95.65.038	36	35°	3800	6500	Ø95x140	0,40