




MODUS-R

05638

Adjustable Track Spot Luminaire Modus R is a track spotlight designed to provide controlled accent lighting in stores, showrooms, galleries, and exhibition spaces. Its aluminum housing, CRI>90 color rendering index, and 15°, 30°, 45°, and 60° reflector options allow for precise light direction according to needs. It offers efficient and long-lasting use with COB LED technology, while adapting to different project and automation ratios thanks to DALI, Casambi, and Bluetooth control options.

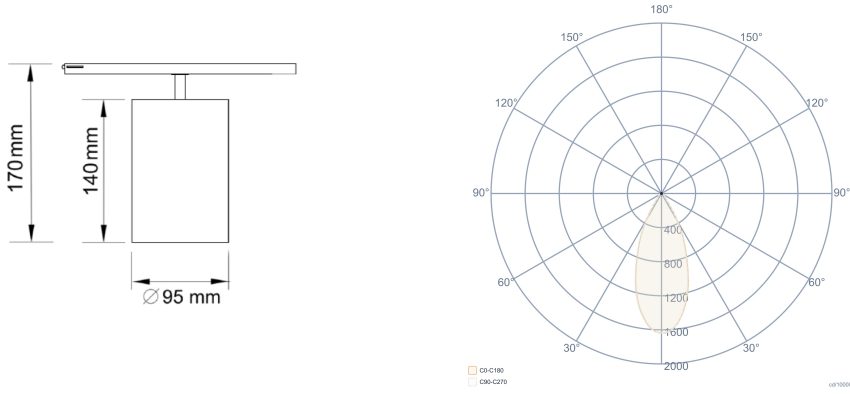

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Injection	Power	20-30-36W	Light Output Angle	15°- 30°- 45°- 60°
Optics	Metallized Surface Optics	Power Factor	>0.90	UGR Value	UGR ≤ 16
Diffuser	Transparent Safety Glass	Light Source	COB LED	CRI [Ra]	CRI ≥ 90
Paint	Electrostatic Powder Coating	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class III	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V Tunable White CRI>90 , 2700K~6500K , Tunable White 2700K ~ 6500K Casambi, Bluetooth Control	
Product Dimensions [mm]	Ø95(D)x140(L)	LED Driver	Rail Driver		
Mounting Type	Rail Socket	Ambient Temperature	-20°C / +50°C		
Mounting Part	Single-Phase Rail Socket	LED Lifetime L70	>100.000 Hour		

Order Code	W	Angle	Lm	CCT	ØD x H (mm)	Kg
05637.95.30.038	36	35°	3800	3000	Ø95x140	0,40

