




## MODUS-R

### 05638

**Adjustable Track Spot Luminaire** Modus R is a track spotlight designed to provide controlled accent lighting in stores, showrooms, galleries, and exhibition spaces. Its aluminum housing, CRI>90 color rendering index, and 15°, 30°, 45°, and 60° reflector options allow for precise light direction according to needs. It offers efficient and long-lasting use with COB LED technology, while adapting to different project and automation ratios thanks to DALI, Casambi, and Bluetooth control options.

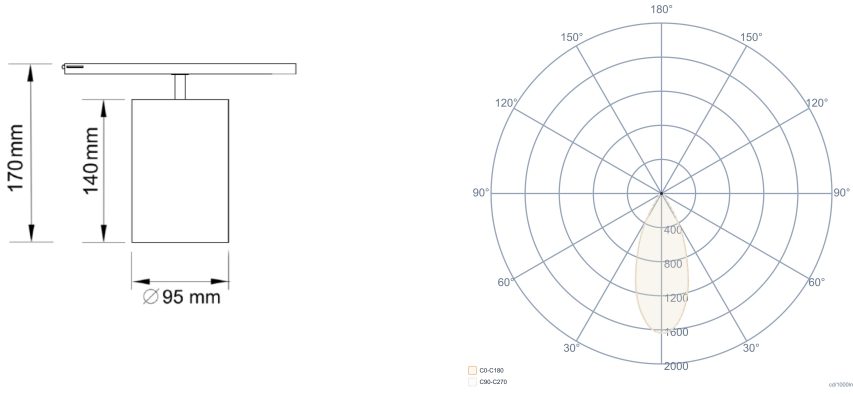

| General Information     |                              | Electrical Info     |                        | Lighting Technology |                    |
|-------------------------|------------------------------|---------------------|------------------------|---------------------|--------------------|
| Housing                 | Aluminum Injection           | Power               | 20-30-36W              | Light Output Angle  | 15°- 30°- 45°- 60° |
| Optics                  | Metallized Surface Optics    | Power Factor        | >0.90                  | UGR Value           | UGR ≤ 16           |
| Diffuser                | Transparent Safety Glass     | Light Source        | COB LED                | CRI [Ra]            | CRI ≥ 90           |
| Paint                   | Electrostatic Powder Coating | Cabling             | Halojen-Free           | Color Bin Value     | Mc Adams ≤ 3       |
| Insulation Class        | Class III                    | Input Voltage       | 220-240V AC / 50-60 Hz | Optional            |                    |
| Product Dimensions [mm] | Ø95(D)x140(L)                | LED Driver          | Rail Driver            |                     |                    |
|                         |                              | Ambient Temperature | -20°C / +50°C          |                     |                    |
| Mounting Type           | Rail Socket                  | LED Lifetime L70    | >100.000 Hour          |                     |                    |
| Mounting Part           | Single-Phase Rail Socket     |                     |                        |                     |                    |

| Order Code      | W  | Angle | Lm   | CCT  | ØD x H (mm) | Kg   |
|-----------------|----|-------|------|------|-------------|------|
| 05637.95.40.021 | 20 | 35°   | 2100 | 4000 | Ø95x140     | 0,40 |