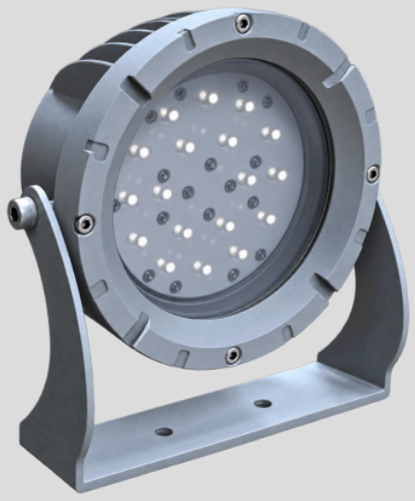


RAL 9005


POINT


09397

Outdoor Facade Projector

Point is designed to provide long-distance and controlled lighting for architectural facades, monumental structures, bridges, and landscape applications. Thanks to its robust optical structure and various light distribution options, it creates a high visual impact while highlighting architectural details. Its corrosion-resistant aluminum housing, IP65 protection class, and suitability for harsh outdoor conditions ensure long-lasting use. With its optical options, it provides solutions for different project needs, from narrow-angle accent lighting to wide surface lighting.

With its highly efficient optical system, robust mechanical structure, and long service life, Point is a reliable and professional facade lighting solution for building facades, historical structures, towers, bridges, landscape areas, and monumental architectural projects.

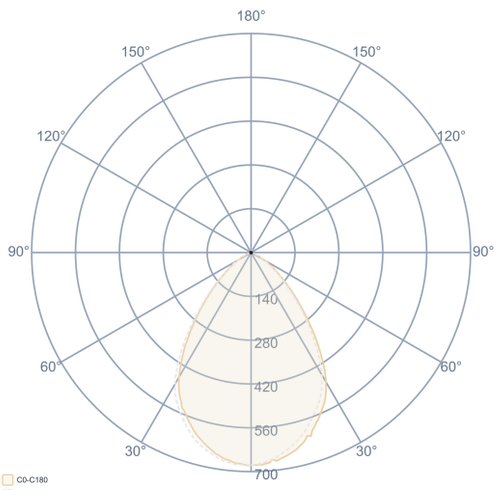

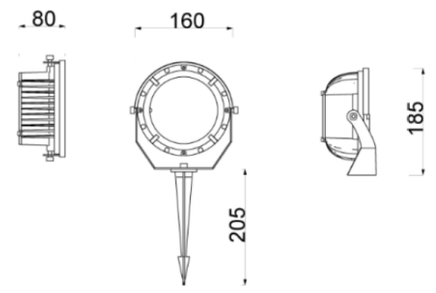

General Information	
Body & Frame	Aluminum Injection Molded
Glass	Tempered Clear Glass
Optics	Acrylic Lens
Gasket	Silicon
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø160x80x185mm
Mounting Type	Surface

Electrical Info	
Power	13-40W
Power Factor	>0.95
Light Source	Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour
Overvoltage	6KV-10 KV

Lighting Technology	
Light Output Angle	15°-30°-45°-60°-90°-120°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 70
Color Temperature (CCT)	2700K-4000K-5000K-6000K-Green-Blue
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	Angle	ØD x H (mm)	Kg
09397.11.60.016	13	1600	6000	15°-30°-45°-60°-90°-120°	Ø160x80x185	1,15
09397.11.60.026	20	2600	6000	15°-30°-45°-60°-90°-120°	Ø160x80x185	1,15
09397.11.60.036	28	3600	6000	15°-30°-45°-60°-90°-120°	Ø160x80x185	1,15
09397.11.60.052	40	5200	6000	15°-30°-45°-60°-90°-120°	Ø160x80x185	1,15

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com