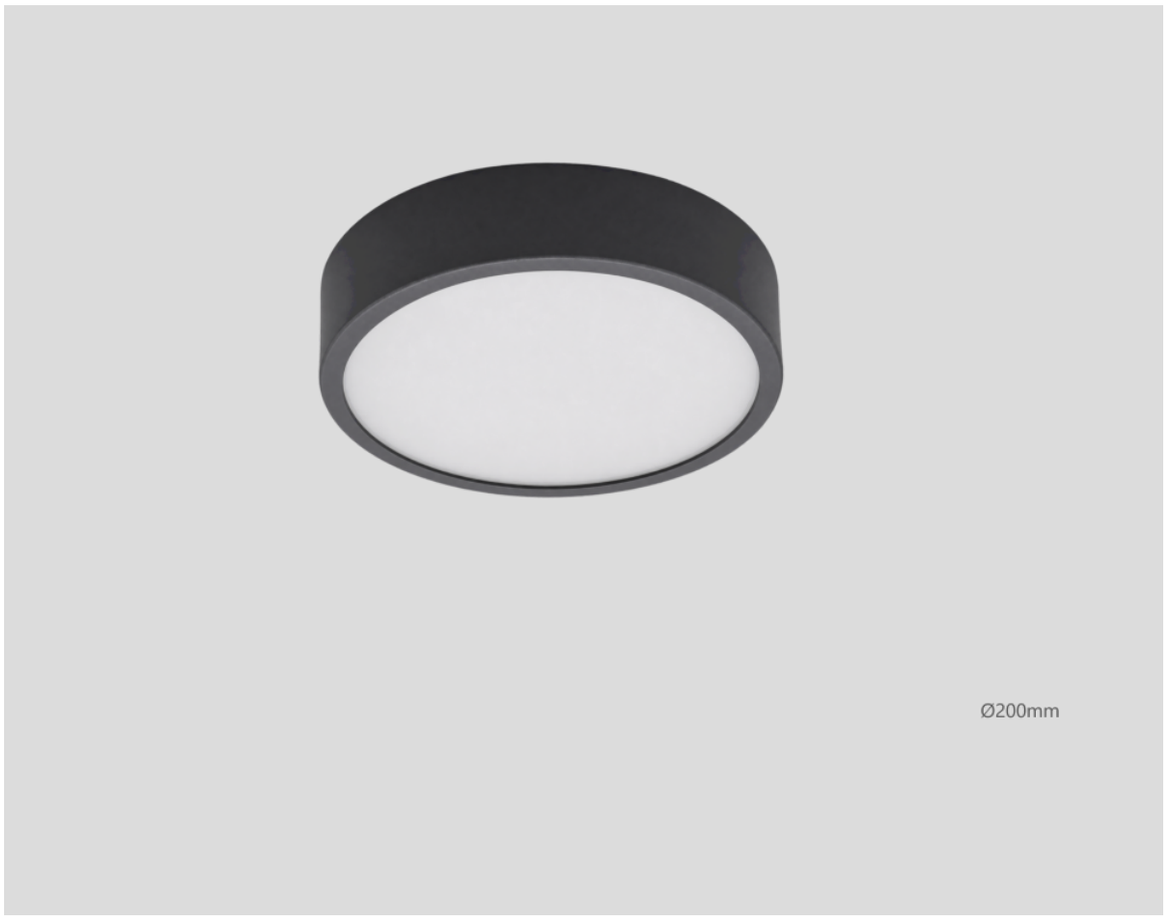


GLOW


03170

Cylindrical Surface Mounted Lighting Fixture

The Glow series is a surface-mounted downlight solution that combines aesthetics and performance within an elegant, compact form, featuring a sheet-metal housing. With its minimalist design and uniform light distribution, it provides comfortable illumination for offices, retail stores, hotels, educational facilities, and various commercial spaces. Its compact, direct-to-ceiling mounting design offers a stylish and functional solution, particularly for projects where recessed installation is not feasible.

Available in diameters of Ø200mm and Ø250mm, it adapts to diverse ceiling heights and lighting requirements. A variety of power ratings, color temperatures, and control options allow for the creation of tailored lighting scenarios specific to each project.

RAL 9016 RAL 9005 RAL 9006 RAL 7016

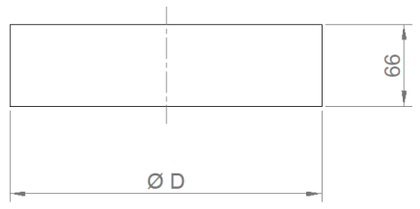

General Information	
Body & Frame	Aluminum Injection
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø200/250x66(H)
Mounting Type	Surface
Mounting Part	Screw and Dowel Set

Electrical Info	
Power	13-23W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit
With microwave radar sensor (on/off) (Ø250mm)

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
03170.20.30.014	13	1310	3000	Ø200x66	0,90
03170.20.40.014	13	1420	4000	Ø200x66	0,90
03170.20.30.020	19	1960	3000	Ø200x66	1,50
03170.20.40.020	19	2040	4000	Ø200x66	1,50
03170.25.30.014	13	1320	3000	Ø250x66	1,50
03170.25.40.014	13	1430	4000	Ø250x66	1,50
03170.25.30.020	19	1980	3000	Ø250x66	1,50
03170.25.30.020	19	2060	4000	Ø250x66	1,50
03170.25.30.024	23	2360	3000	Ø250x66	1,50
03170.25.40.024	23	2440	4000	Ø250x66	1,50

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com