

**Gövde**

Elektrostatik toz boyalı alüminyum profil

Optik

Yüksek ışık geçirgenlikli opal difüzör

İşık Kaynağı



50.000 saat ömürlü yüksek etkin faktörüne sahip SMD Mid Power LED

Sürücü

Sabit akım çıkışlı pf>0.90

Renk Seçenekleri

RAL9016 / RAL9006 / RAL9005

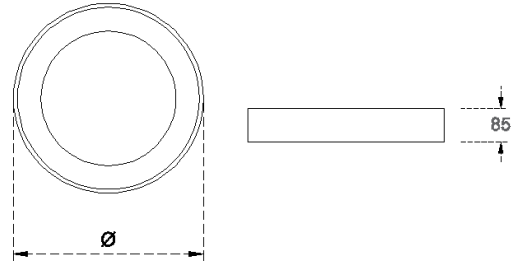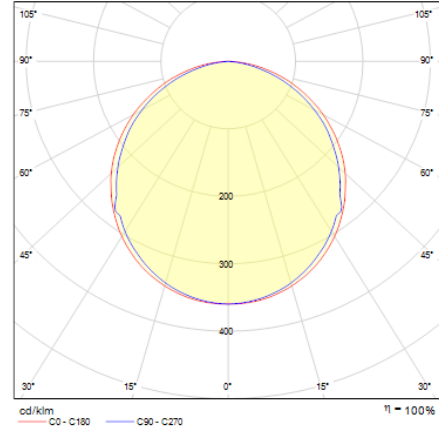

| Sipariş Kodu | W | Lm | K | CRI | Ø |
|-----------------|-----|-------|------|--------|------|
| 01140.60.30.040 | 40 | 4008 | 3000 | Ra >80 | 600 |
| 01140.60.30.059 | 60 | 5664 | 3000 | Ra >80 | 600 |
| 01140.90.30.063 | 60 | 6048 | 3000 | Ra >80 | 900 |
| 01140.90.30.084 | 90 | 8379 | 3000 | Ra >80 | 900 |
| 01140.12.30.066 | 60 | 6336 | 3000 | Ra >80 | 1200 |
| 01140.12.30.112 | 120 | 11173 | 3000 | Ra >80 | 1200 |
| 01140.15.30.140 | 150 | 13966 | 3000 | Ra >80 | 1500 |
| 01140.60.40.044 | 40 | 4305 | 4000 | Ra >80 | 600 |
| 01140.60.40.059 | 60 | 5900 | 4000 | Ra >80 | 600 |
| 01140.90.40.063 | 60 | 6300 | 4000 | Ra >80 | 900 |
| 01140.90.40.090 | 90 | 9001 | 4000 | Ra >80 | 900 |
| 01140.12.40.066 | 60 | 6600 | 4000 | Ra >80 | 1200 |
| 01140.12.40.120 | 120 | 12002 | 4000 | Ra >80 | 1200 |
| 01140.15.40.150 | 150 | 15002 | 4000 | Ra >80 | 1500 |