

**Gövde**

Elektrostatik toz boyalı alüminyum profil

**Optik**

Yüksek ışık geçirgenlikli opal polikarbon difüzör

**Işık Kaynağı**



50.000 saat ömürlü yüksek etkin faktörüne sahip SMD Mid Power LED

**Sürücü**

Sabit akım çıkışlı pf&gt;0.90

**Renk Seçenekleri**

RAL9016 / RAL9006 / RAL9005

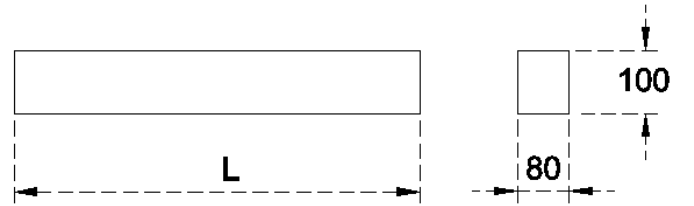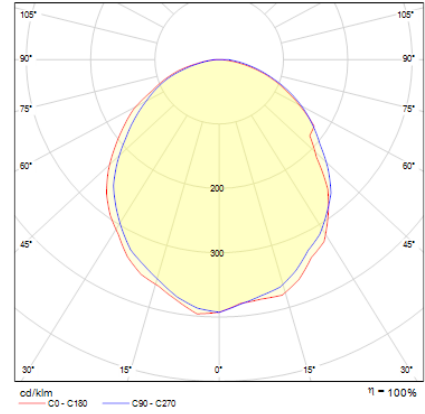

Sipariş Kodu	W	Lm	K	CRI	Kg	L
01180.81.30.015	15	1525	3000	Ra >80	2,2	580
01180.81.30.021	21	2110	3000	Ra >80	2,2	580
01180.81.30.023	22	2288	3000	Ra >80	2,3	865
01180.81.30.032	31	3164	3000	Ra >80	2,3	865
01180.81.30.031	29	3050	3000	Ra >80	2,3	1147
01180.81.30.043	42	4219	3000	Ra >80	2,3	1147
01180.81.30.038	36	3814	3000	Ra >80	2,3	1420
01180.81.30.053	52	5274	3000	Ra >80	2,3	1420
01180.81.30.046	44	4577	3000	Ra >80	2,4	1712
01180.81.30.064	62	6329	3000	Ra >80	2,4	1712
01180.81.40.016	15	1589	4000	Ra >80	2,2	580
01180.81.40.022	21	2198	4000	Ra >80	2,2	580
01180.81.40.024	22	2384	4000	Ra >80	2,2	865
01180.81.40.033	31	3296	4000	Ra >80	2,2	865
01180.81.40.032	29	3178	4000	Ra >80	2,3	1147
01180.81.40.044	42	4395	4000	Ra >80	2,3	1147
01180.81.40.039	36	3973	4000	Ra >80	2,3	1420
01180.81.40.055	52	5494	4000	Ra >80	2,3	1420
01180.81.40.048	44	4768	4000	Ra >80	2,4	1712
01180.81.40.066	62	6593	4000	Ra >80	2,4	1712