

**Gövde**

Elektrostatik toz boyalı alüminyum profil

Optik

Yüksek ışık geçirgenlikli opal difüzör

Işık Kaynağı


50.000 saat ömürlü yüksek etkin faktörüne sahip SMD Mid Power LED

Sürücü

Sabit akım çıkışlı pf>0.90

Renk Seçenekleri

RAL9016 / RAL9006 / RAL9005

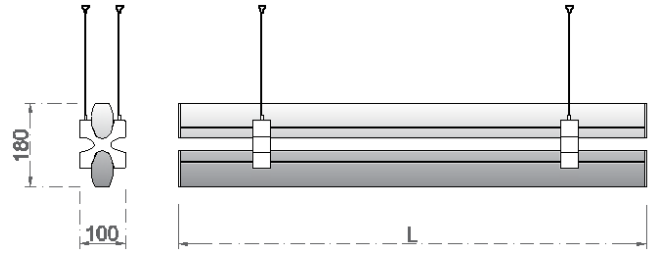

| Sipariş Kodu | W | Lm | K | CRI | L |
|-----------------|----|------|------|--------|------|
| 01190.11.30.053 | 55 | 5350 | 3000 | Ra >80 | 1140 |
| 01190.11.30.065 | 65 | 6530 | 3000 | Ra >80 | 1420 |
| 01190.11.40.056 | 55 | 5570 | 4000 | Ra >80 | 1140 |
| 01190.11.40.068 | 65 | 6800 | 4000 | Ra >80 | 1420 |