**Gövde**

Aluminyum profil

**Optik**

Yüksek ışık geçirgenlikli opal polikarbon difüzör

**Işık Kaynağı**




50.000 saat ömürlü yüksek etkin faktörüne sahip SMD Mid Power LED

**Sürücü**

Sabit akım çıkışlı pf&gt;0.90

**Renk Seçenekleri**

Mat eloksal

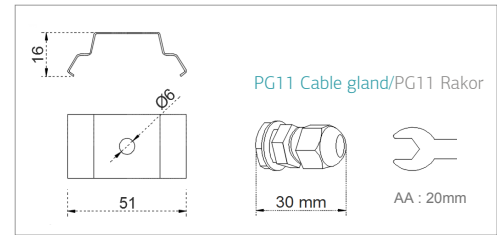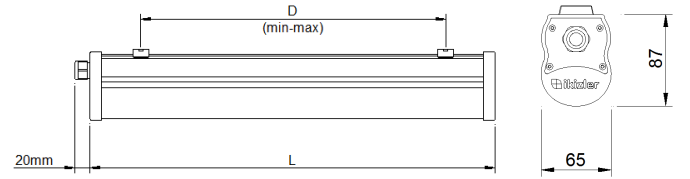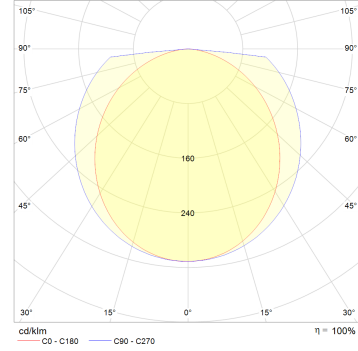

Sipariş Kodu	W	Lm	K	CRI	L
07102.06.30.021	19	2053	3000	Ra >80	600
07102.09.30.022	20	2173	3000	Ra >80	880
07102.09.30.031	29	3079	3000	Ra >80	880
07102.09.30.042	42	4229	3000	Ra >80	880
07102.12.30.020	19	2047	3000	Ra >80	1160
07102.12.30.029	29	2897	3000	Ra >80	1160
07102.12.30.042	38	4106	3000	Ra >80	1160
07102.15.30.051	48	5130	3000	Ra >80	1440
07102.06.40.022	19	2139	4000	Ra >80	600
07102.09.40.023	20	2264	4000	Ra >80	880
07102.09.40.032	29	3208	4000	Ra >80	880
07102.09.40.044	42	4405	4000	Ra >80	880
07102.12.40.021	19	2132	4000	Ra >80	1160
07102.12.40.030	29	3018	4000	Ra >80	1160
07102.12.40.043	38	4278	4000	Ra >80	1160
07102.15.40.053	48	5340	4000	Ra >80	1440