

**Gövde**

Alüminyum Enjeksiyon - Soğutucu Alüminyum Ekstrüzyon Profil

**Reflektör**

Parlak anodize alüminyum reflektör

**Cam**

Temperli şeffaf cam

**Işık Kaynağı**



50.000 saat ömürlü yüksek etkin faktörüne sahip COB LED

**Sürücü**

Sabit akım çıkışlı pf&gt;0.90

**Renk Seçenekleri**

RAL9016 / RAL9006 / RAL9005

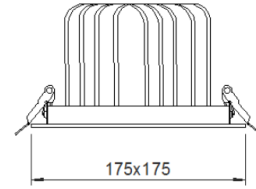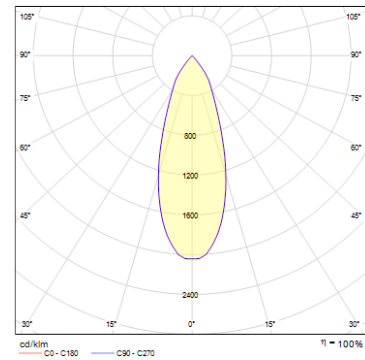

Sipariş Kodu	W	Lm	K	Ra	H
52682.11.30.016	13	1600	3000	>80	100
52682.11.30.021	18	2100	3000	>80	100
52682.11.30.050	34	3700	3000	>80	100
52682.11.40.017	13	1700	4000	>80	100
52682.11.40.022	18	2200	4000	>80	100
52682.11.40.039	34	3900	4000	>80	100