

LIGHTLINE 150


01180


Indoor Surface Mounted Linear Luminaire

Lightline 150 Series, with its 150 mm wide profile structure, creates a powerful lighting effect and a strong architectural emphasis in large-scale spaces. Its opal diffuser provides homogeneous light distribution and a wide illuminated surface, delivering a fuller and more distinctive linear lighting effect within the space.

With its aluminum body and wide profile design, Lightline 150 stands out as a strong design element, especially in modern office, commercial and architectural projects. Offering various color temperature and control options, the Lightline 150 Series adapts to project-specific lighting scenarios, while its suspended and surface-mounted installation alternatives provide flexible solutions for different application needs.

RAL 9016 RAL 9005 RAL 9006

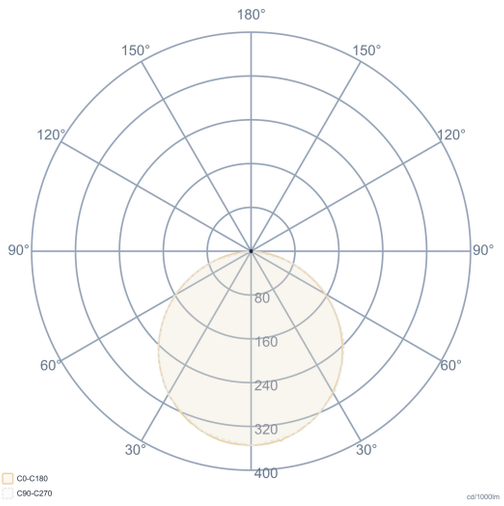

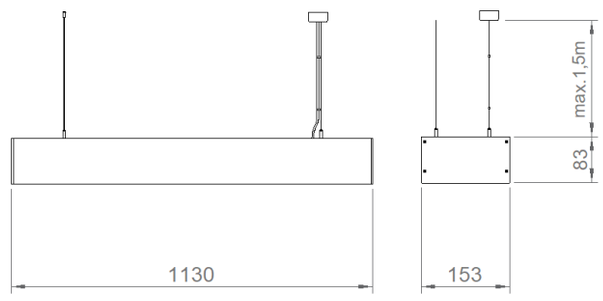

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	**Power**	39W-45W	**Light Output Angle**	120°
Side Cover	Metal Cover	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Optics	Opal Diffuser	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Paint	Electrostatic Powder Paint	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**Input Voltage**	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	153(W) x 83(H)	**LED Driver**	Constant Current		
Mounting Type	Surface and Pendant	**Ambient Temperature**	-20°C / +50°C		
Mounting Part	Height Adjustable Steel Wire	**LED Lifetime L70**	>102.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
01180.18.30.038	39	3860	3000	1130	3,80
01180.18.40.040	39	4100	4000	1130	3,80
01180.18.30.043	45	4360	3000	1130	3,80
01180.18.40.045	45	4670	4000	1130	3,80

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com