

Duet-P

Indoor Lighting - Pendant Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Reflector	Glare Controlled Optics
Paint	Electrostatic Powder Painted
Dimensions(mm)	37(W) x 75(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	36°
UGR Value	UGR ≤ 17
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL




Power (W)	22-34W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Emergency Lighting Unit	- CRI > 90
- 2700K ~ 6500K	- Different RAL Color Options
- Plug-in Energy Input Connector	- Class-II Protection Class
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Pendant
Mounting Apparatus	Height Adjustable Steel Wire

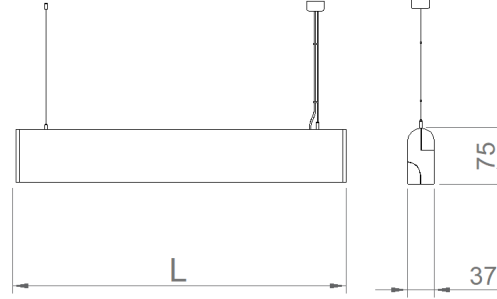

Order Code	W	Lm	CCT	WxH (mm)	CRI	L (mm)	Kg
01181.37.30.030	28	3000	3000	39x78	Ra>80	1225	3,6
01181.37.40.032	28	3200	4000	39x78	Ra>80	1225	3,6
01181.37.30.036	34	3660	3000	36x75	Ra>80	1495	4,4
01181.37.40.038	34	3880	4000	36x75	Ra>80	1495	4,4

