

# Tetrad-060

Indoor Lighting - Spot Lighting



## Colour Options



## TECHNICAL INFORMATION

<b>Housing</b>	Metal Sheet
<b>Diffuser</b>	Opal with High Light Transmittance
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	110°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL




<b>Power (W)</b>	3,5-14W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halojen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Emergency Lighting Kit	- CRI > 90
- 2700K ~ 6500K	- Different RAL Color Options
- Plug-in Energy Input Connector	- Class-II Protection Class
- PIR Sensor	- AC-DC Supply(MBS)

## ASSEMBLY

**Installation Type** Metal Suspended Ceiling

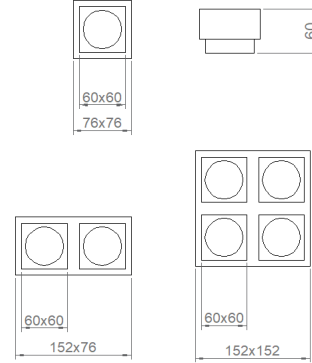

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
05348.22.30.002	3,5	250	3000	Ra>80	76x76x60	0,2
05348.22.40.002	3,5	260	4000	Ra>80	76x76x60	0,2
05348.22.30.005	7	500	3000	Ra>80	152x76x60	0,3
05348.22.40.005	7	520	4000	Ra>80	152x76x60	0,3
05348.22.30.010	14	1000	3000	Ra>80	152x152x60	0,5
05348.22.40.010	14	1041	4000	Ra>80	152x152x60	0,5

