


# Watercourse - IP66

Indoor Lighting - Industrial Lighting



## Colour Options

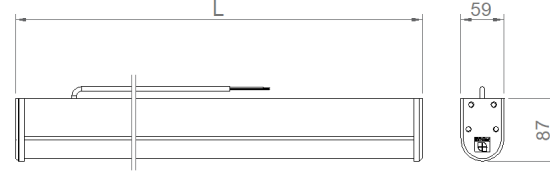

Ral 9016



Ral 9006



Ral 9005

## TECHNICAL INFORMATION

<b>Housing</b>	Extrusion Aluminum Profile
<b>Side Cover</b>	Aluminum Injection
<b>Diffuser</b>	High Light Transmittance Opal
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	110°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL

<b>Power (W)</b>	26W-65W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

## ASSEMBLY

<b>Installation Type</b>	Surface Mounted, Pendant
<b>Mounting Apparatus</b>	Height Adjustable Steel Wire

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
07109.05.30.034	26	3400	3000	Ra>80	595	2
07109.05.40.037	26	3700	4000	Ra>80	595	2
07109.08.30.050	39	5000	3000	Ra>80	875	2,6
07109.08.40.055	39	5500	4000	Ra>80	875	2,6
07109.11.30.065	52	6500	3000	Ra>80	1155	3,2
07109.11.40.072	52	7200	4000	Ra>80	1155	3,2
07109.14.30.082	65	8200	3000	Ra>80	1435	4
07109.14.40.091	65	9100	4000	Ra>80	1435	4

