


RAL 7016

RETRO

09592

It Adds Value to Urban Aesthetics

Retro is an urban lighting solution we developed for parks, squares, walkways, campuses, and historical surroundings, featuring a decorative design and a high-performance optical system. Thanks to its symmetrical and asymmetrical optical options, it provides light distribution suitable for different project needs, while supporting energy savings with its 130 lm/W system efficiency. With its IP65 protection class, IK08 impact resistance, and corrosion-resistant housing, it offers long-lasting and reliable use in outdoor conditions, while its classic design adds an aesthetic touch to urban architecture.

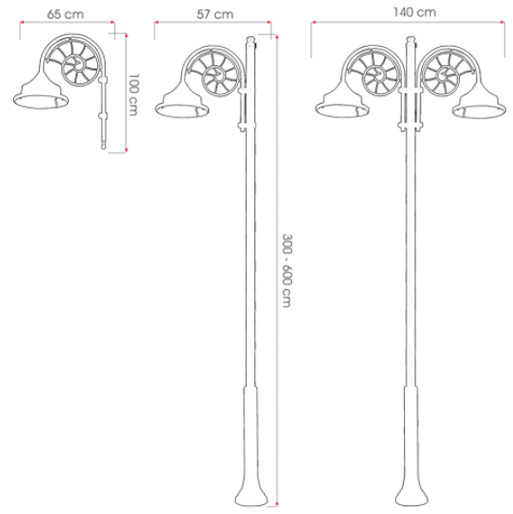

General Information	
Housing	Corrosion Resistant Aluminum Injection
Pole	Corrosion Resistant Galvanized Steel
Optics	PMMA Lens + Glass
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	140(W) x 3000/4000/4500/6000(H)
Mounting Type	Surface

Electrical Info	
Power	2x42-2x112W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	60° / 150°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White

Order Code	W	Lm	CCT	WxH (mm)
09592.13.30.106	2x41	5400	3000	140x3000
09592.13.40.106	2x41	5600	4000	140x3000
09592.13.30.148	2x57	14200	3000	140x4000
09592.13.40.148	2x57	14800	4000	140x4000
09592.13.30.221	2x85	22000	3000	140x4500
09592.13.40.221	2x85	22500	4000	140x4500
09592.13.30.291	2x112	28500	3000	140x6000
09592.13.40.291	2x112	29200	4000	140x6000

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com