DEEP-Y

09111

Minimal lighting in a cylindrical form

Deep-Y is a simple and elegant spotlight solution developed for modern architectural projects, featuring a cylindrical body and surface mounting design. Its extruded aluminum body and metallized reflector optics provide controlled light distribution, while its UGR≤19 value enhances visual comfort.

With a 36° beam angle, high-efficiency optical system, and compact design, it can be used in general and accent lighting applications. Available in white, gray, and black, Deep-Y adapts to various interior design concepts, combining modern aesthetics with high-performance lighting in offices, shops, hotels, restaurants, and social spaces.

RAL 9016 RAL 9005 RAL 9006

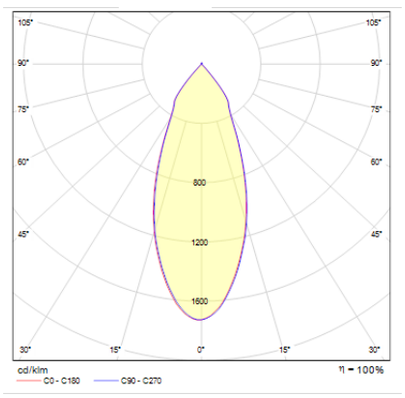

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	**Power**	10W	**Light Output Angle**	36°
Frame	Aluminum Injection	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 19
Optics	Polished Reflector	**Light Source**	COB LED	**CRI [Ra]**	CRI ≥ 80
Paint	Electrostatic Powder Coating	**Cabling**	Halojen-Free	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**Input Voltage**	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	Ø80 x 100(H)	**LED Driver**	Constant Current		
Mounting Type	Surface	**Ambient Temperature**	-20°C / +50°C		
Mounting Part	Screw Dowel Set	**LED Lifetime L70**	>50.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Kit

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Kg
09111.90.30.009	10	700	36°	3000	80x100	0,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com